


SPECIAL HOLD DOWN CLAMPS

These models have vertical handles and are designed for mounting on the horizontal or the vertical side. These toggle clamps allow users to mount the clamp on the side of the table or fixtures to save precious work surface for other uses. This model includes embossed handles.

Spindle supplied: 518208
Holding capacity: 374 lbs. Maximum
Movement: Handle 55°, bar 96°

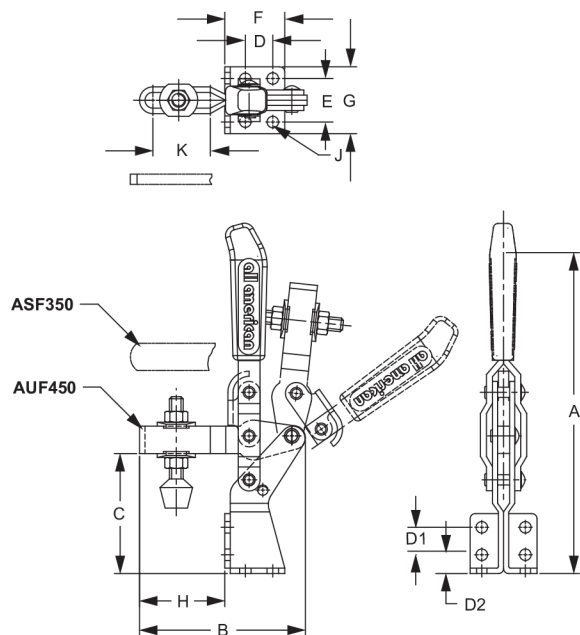


SERIES ASF350, AUF450

P/N	TYPE	A	B	C	D	D1	D2	E	F	G	H	J	K
ASF350	S, SDB	8.00	4.06	2.76	.63	.63	.43	1.00	1.38	1.54	2.17	.26	-
AUF450	U, SDB, L	8.00	3.81	2.76	.63	.63	.43	1.00	1.38	1.54	1.96	.26	1.32

This model has an embossed handle and is designed with two mounting areas, horizontal and side. Side mounted toggle clamps allow users to mount the clamp on the side of the table or fixture to save precious work surface for other uses.

Spindle supplied: 518208
Holding capacity: 220 lbs. Maximum
Movement: Handle 60°, Bar 185°

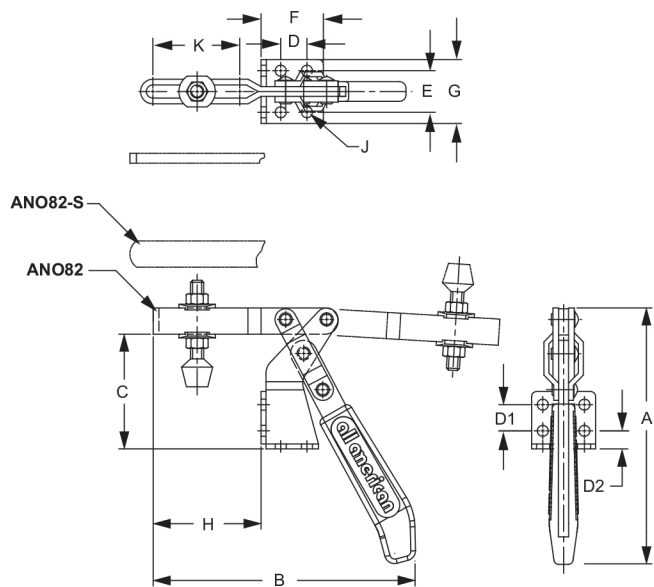

SERIES ANO82, ANO82-S

P/N	TYPE	A	B	C	D	D1	D2	E	F	G	H	J	K
ANO82	U, SDB	5.94	6.18	2.76	.63	.63	.43	1.00	1.38	1.54	2.59	.26	1.97
ANO82-S	S, SDB, L	5.94	6.74	2.76	.63	.63	.43	1.00	1.38	1.54	3.15	.26	-



SPECIAL HOLD DOWN CLAMPS

These special hold down models are equipped with embossed handle grips for secure holding purposes. These models are furnished with hex head spindle assembly and two flange washers. They are available in large and small models.

Spindle Supplied: 420125 (small)
518207 (large)

Holding capacity: 550 lbs. Maximum (small)
620 lbs. Maximum (large)

Movements: Handle 70°, Bar 75° (small)
Movements: Handle 80°, Bar 75° (large)

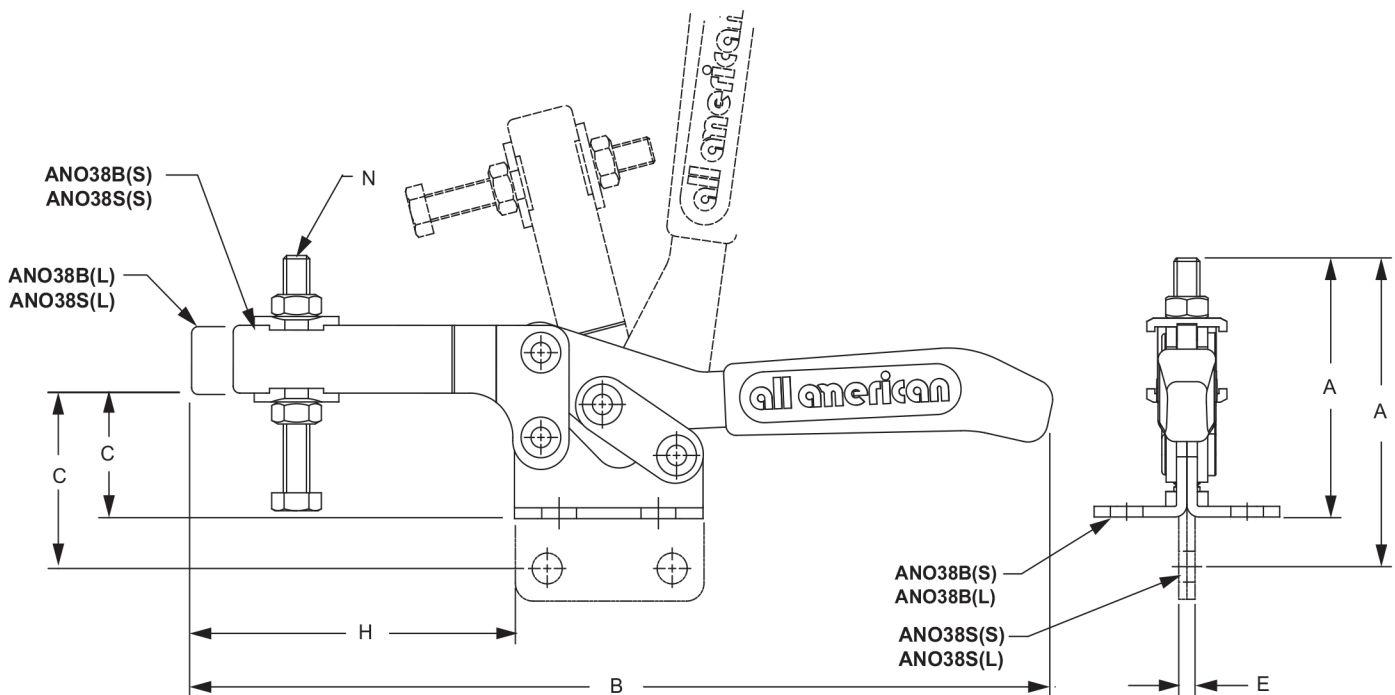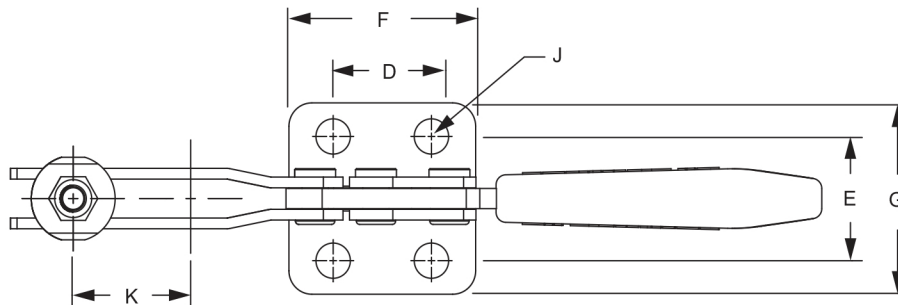


SERIES ANO38B(S), ANO38B(L)

P/N	TYPE	A	A1	B	C	C1	D	E	F	G	H	J	K	N
ANO38B(S)	U, FB	1.57	-	6.58	.94	-	.94	1.34	1.65	2.05	1.70	.33	1.00	1/4-20
ANO38S(S)	U, SB	-	2.11	6.58	-	1.50	.94	.18	1.65	-	1.70	.33	1.00	1/4-20
ANO38B(L)	L, U, FB	2.28	-	9.75	1.46	-	1.18	1.46	2.24	2.24	3.35	.41	2.17	5/16-18
ANO38S(L)	L, U, SB	-	2.76	9.75	-	1.97	1.18	.25	2.24	-	3.35	.41	2.17	5/16-18

SPECIAL HOLD DOWN CLAMPS

These special vertical handle clamps are furnished with hex head spindle assembly and two flange washers. The ANO42A and ANO42K models included with an embossed grip. The ANO42P and ANO42S models are designed with T-handles without grips. The stainless steel models are furnished with stainless steel spindles.

Spindle Supplied: 518205 (steel)
518205-2S (stainless steel)
Holding capacity: 330 lbs. Maximum
Movements: Handle 54°, Bar 94°

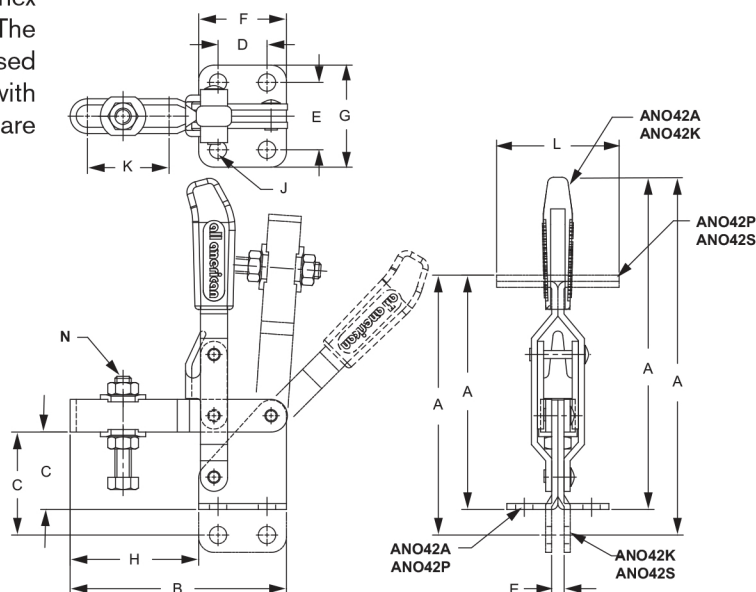


SERIES ANO42A, ANO42K, ANO42P, ANO42S

P/N	TYPE	A	A1	B	C	C1	D	E	F	G	H	J	K	L	N
ANO42A	U, FB, SH	5.96	-	4.17	1.50	-	.94	1.30	1.69	1.97	2.48	.33	1.57	-	5/16-18
ANO42A-2S	U, FB, SH, 2S	5.96	-	4.17	1.50	-	.94	1.30	1.69	1.97	2.48	.33	1.57	-	5/16-18
ANO42K	U, SB, SH	-	6.45	4.17	-	1.99	.94	.24	1.69	-	2.48	.33	1.57	-	5/16-18
ANO42K-2S	U, SB, SH, 2S	-	6.45	4.17	-	1.99	.94	.24	1.69	-	2.48	.33	1.57	-	5/16-18
ANO42P	U, FB, TH	4.52	-	4.17	1.50	-	.94	1.30	1.69	1.97	2.48	.33	1.57	2.36	5/16-18
ANO42S	U, SB, TH	-	5.02	4.17	-	1.99	.94	.24	1.69	-	2.48	.33	1.57	2.36	5/16-18

This model has a vertical handle and is designed for side mounting. Side mounted toggle clamps allow users to mount the clamp on the side of the table or fixture to save precious work surface for other uses. This model includes embossed handles.

Spindle supplied: 508208
Holding capacity: 198 lbs. Maximum
Movement: Handle 64°, Bar 100°

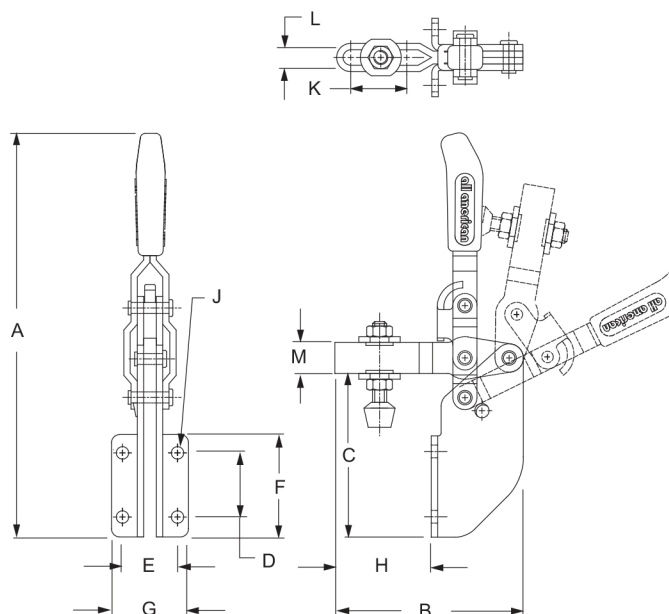

SERIES AHV450-F

P/N	TYPE	A	B	C	D	E	F	G	H	K	J	L	M
AHV270-F	U, SDB	5.93	2.62	.89	.55	.79	.98	1.10	1.34	.79	.18	.22	.43